

Features

- System board for Honeywell Experion PKS, Series C
- For 32-channel card CC-TDIL01/11
- For 16 modules
- Recommended module: HiC2822 (DI)
- Recommended system cable: CAB-HON-**-S37C32-MX-01000
- 24 V DC supply
- Hazardous area: pluggable screw terminals, blue
- Non-hazardous area: Sub-D connector (male), 37-pin

Function

The Termination Board has 16 plug-in slots.

The function of the Termination Board as well as the connector pin assignment exactly fit the requirement of Honeywell systems.

Information about missing supply voltage of the interface modules is available for the system as potential free relay contact. Wiring errors from field will be reported if the interface module supports this function.


The Termination Boards are supplied with a robust glass fibre reinforced plastic housing as standard. This design permits the fast and reliable installation in the switch cabinet.

Application

2 system cables are required.



Connection

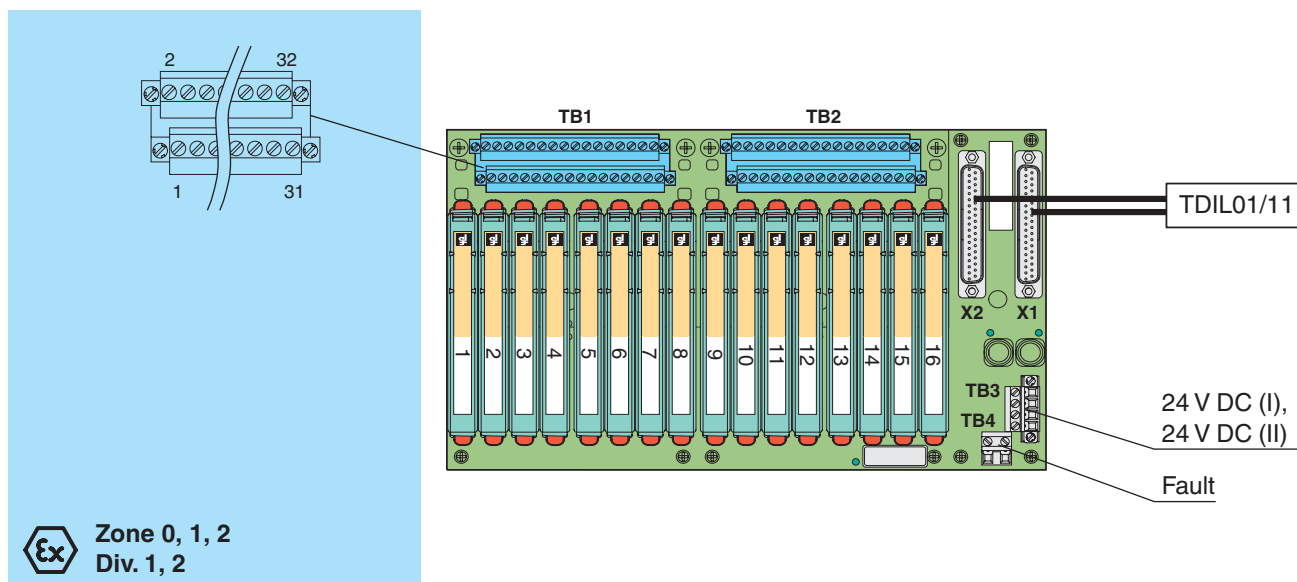

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Supply	
Connection	terminal block TB3 (1-, 2+; 3-, 4+)
Nominal voltage	24 V DC , in consideration of rated voltage of used isolators
Voltage drop	0.9 V , voltage drop across the series diode on the termination board must be considered
Ripple	≤ 10 %
Fusing	4 A
Power dissipation	≤ 500 mW , without modules
Reverse polarity protection	yes
Redundancy	
Supply	Redundancy available. The supply for the isolators is decoupled, monitored and fused.
Fault indication output	
Output type	volt-free contact
Contact loading	30 V DC , 1 A
Indicators/settings	
Display elements	LEDs PWR ON (power supply) - LED power supply I, green LED - LED power supply II, green LED LED Fault (fault indication), green LED
Directive conformity	
Electromagnetic compatibility Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Conformity	
Electromagnetic compatibility	NE 21:2012 For further information see system description.
Degree of protection	IEC 60529:2001
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications	
Degree of protection	IP20
Connection	
Field side	explosion hazardous area: pluggable screw terminals , blue
Control side	non-explosion hazardous area: 37-pin Sub-D connector
Supply	pluggable screw terminals , black
Fault output	pluggable screw terminals , black
Core cross-section	screw terminals: 0.2 ... 2.5 mm ² (24 ... 12 AWG)
Material	housing: polycarbonate
Mass	approx. 900 g
Dimensions	273 x 155 x 153 mm (L x W x H) , height including module assembly
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas	
EU-Type Examination Certificate	CESI 06 ATEX 022
Marking	⊕ II (1)G [Ex ia Ga] IIC ⊕ II (1)D [Ex ia Da] IIIC ⊕ I (M1) [Ex ia Ma] I
Non-hazardous area	
Maximum safe voltage	250 V (Attention! U _m is no rated voltage.)
Galvanic isolation	
Field circuit/control circuit	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 50303:2000
International approvals	
UL approval	
Control drawing	116-0327
IECEX approval	
Approved for	[Ex ia Ga] IIC [Ex ia Da] IIIC [Ex ia Ma] I
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .
Accessories	
Designation	provided accessory: Label Carrier HiALC-HI*TF-SET-1** optional accessories: system cable CAB-HON-**-S37C32-MX-01000

Release date 2018-09-11 13:59 Date of issue 2018-09-11 209350_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Pin-out Table

Termination Board field side			Modules		Termination Board control side
Module	Channel	IS Terminal TB1	IS terminals SL2 field side	Non-IS terminals SL1 control side	System connector X1
1	1	1	5a	8a	37
		2	5b	7a	19
	2	3	1a	10a	36
		4	1b	9a	18
2	3	5	5a	8a	35
		6	5b	7a	17
	4	7	1a	10a	34
		8	1b	9a	16
3	5	9	5a	8a	33
		10	5b	7a	15
	6	11	1a	10a	32
		12	1b	9a	14
4	7	13	5a	8a	31
		14	5b	7a	13
	8	15	1a	10a	30
		16	1b	9a	12
5	9	17	5a	8a	29
		18	5b	7a	11
	10	19	1a	10a	28
		20	1b	9a	10
6	11	21	5a	8a	27
		22	5b	7a	9
	12	23	1a	10a	26
		24	1b	9a	8
7	13	25	5a	8a	25
		26	5b	7a	7
	14	27	1a	10a	24
		28	1b	9a	6
8	15	29	5a	8a	23
		30	5b	7a	5
	16	31	1a	10a	22
		32	1b	9a	4

Release date 2018-09-11 13:59 Date of issue 2018-09-11 209350_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pin-out Table

Termination Board field side			Modules		Termination Board control side
Module	Channel	IS Terminal TB2	IS terminals SL2 field side	Non-IS terminals SL1 control side	System connector X2
9	17	1	5a	8a	37
		2	5b	7a	19
	18	3	1a	10a	36
		4	1b	9a	18
10	19	5	5a	8a	35
		6	5b	7a	17
	20	7	1a	10a	34
		8	1b	9a	16
11	21	9	5a	8a	33
		10	5b	7a	15
	22	11	1a	10a	32
		12	1b	9a	14
12	23	13	5a	8a	31
		14	5b	7a	13
	24	15	1a	10a	30
		16	1b	9a	12
13	25	17	5a	8a	29
		18	5b	7a	11
	26	19	1a	10a	28
		20	1b	9a	10
14	27	21	5a	8a	27
		22	5b	7a	9
	28	23	1a	10a	26
		24	1b	9a	8
15	29	25	5a	8a	25
		26	5b	7a	7
	30	27	1a	10a	24
		28	1b	9a	6
16	31	29	5a	8a	23
		30	5b	7a	5
	32	31	1a	10a	22
		32	1b	9a	4

Termination Board pin out			
Power supply	TB3	1	Supply I -
		2	Supply I +
		3	Supply II -
		4	Supply II +
Volt-free fault indication output	TB4	1	Fault
		2	

Module pin-out (SL1): module 1 ... 16	
V _{cc}	2a
	2b
GND	1a
	1b
FAULT	6b

Release date 2018-09-11 13:59 Date of issue 2018-09-11 209350_eng.xml