

Digital I/O board, optically isolated, 32 digital inputs and outputs, 24 V, for PC/104-Plus



*PC104-PLUS1500-EXT



Windows
64/32-bit drivers



LabVIEW™



LabWindows/CVI™

Features

- 2 programmable timers

Inputs

- 16 optically isolated digital inputs, 24 V, including 2 interruptible inputs
- Reverse voltage protection
- All inputs are filtered


Outputs

- 16 optically isolated digital outputs, 11 V to 36 V
- Output current per channel 150 mA
- Timer-programmable watchdog for resetting the outputs to "0"
- Diagnostic report through status register at short-circuits, overtemperature, voltage drop or watchdog
- Interrupt triggered through watchdog, timer, error
- At Power-On, the outputs are reset to "0"
- Short-circuit current for 16 outputs ~ 2 A typ.
- Short-circuit current per output ~1.1 A peak
- Self-resetting fuse (electronic fuse)
- Overtemperature and overvoltage protection
- 24 V power outputs with protection diodes and filters
- Output capacitors against electromagnetic emissions
- Ext. 24 V voltage supply screened and filtered
- Shutdown logic, when the external supply voltage drops under 7 V

Safety features

- Optical isolation 1000 V
- Creeping distance IEC 61010-1
- Protection against fast transients (burst), overvoltage, electrostatic discharge and high-frequency EMI
- Separate ground line for inputs and outputs

Protective circuit for the input channels

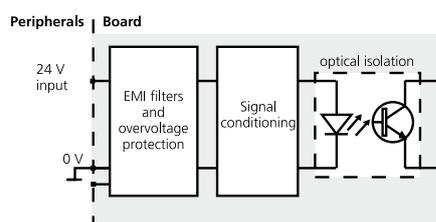

PC104-PLUS1500

16 digital inputs, 24 V,
including 2 interruptible inputs

16 digital outputs, 24 V, 150 mA/channel

Optical isolation 1000 V

Input and output filters

Watchdog, timer, counter

The outputs are reset to "0" at Power-On

Applications

- Industrial I/O control
- PLC coupling
- Signal switching
- Interface to electromechanical relays
- Automatic test equipment
- ON/OFF monitoring of motors, lights...
- ...

Software drivers

A CD-ROM with the following software and programming samples is supplied with the board.

Standard drivers for:

- Linux
- 32-bit drivers for Windows 8 / 7 / Vista / XP / 2000
- Signed 64-bit drivers for Windows 8 / 7 / XP
- Real-time use with Linux and Windows on request

Drivers and samples for the following compilers and software packages:

- Microsoft CVC++ • Borland C++
- Visual Basic • Delphi
- LabVIEW • LabWindows/CVI

ADDIPACK functions


- Digital input • Digital output
- Watchdog • Timer • Counter

On request:

Further operating systems, compilers and samples.

Driver download: www.addi-data.com/downloads

Protective circuit for the output channels

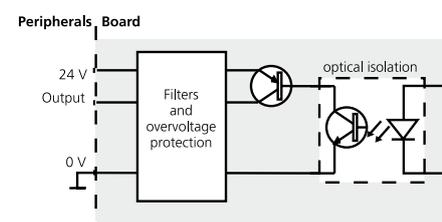

Specifications

Digital inputs

Number of inputs:	16 (common ground acc. to IEC 1131-2) including one input used as a counter input (channel 0)
Interruptible inputs:	2 (channel 2 and 3)
Optical isolation:	through opto-couplers, 1000 V, from PC to peripheral
Interrupt compare logic:	OR mode (with fixed filter times)
Filters for interruptible inputs:	40 µs
Nominal voltage:	24 V
Input current at 24 V:	Channel 0: 6 mA typ. Channel 1-15: 3.9 mA typ.
Logic input levels:	U nominal: 24 V
UH max.:	30 V/current 6 mA typ.
UH min.:	19 V/current 2 mA typ.
UL max.:	14 V/current 0.7 mA typ.
UL min.:	0 V/current 0 mA typ.
Maximal input frequency:	Channel 0: 100 kHz (at 24 V) Channel 1-15: 5 kHz (at 24 V)

Digital outputs

Number of outputs:	16, optically isolated up to 1000 V through opto-couplers
Output type:	High-side (load to ground) acc. to IEC 1131-2
Nominal voltage:	24 V
Supply voltage:	11 V up to 36 V
Current limit:	1.5 A typ. per 8 channels
Output current/output:	150 mA typ.
Short-circuit current/output shutdown at 24 V, $R_{load} < 0.1\Omega$:	1.1 A (typ.) pulse current
RDS ON resistance:	0.2 Ω at 25 °C max.
Switch-on time (typ.):	50 µs
Switch-off time (typ.):	75 µs
Overtemperature (shutdown):	135 °C (output driver)
Temperature hysteresis:	10 °C (output driver)

Safety

Shutdown logic:	When the ext. 24 V voltage drops below 7 V: The outputs are switched off.
Diagnostics:	Status bit or interrupt to the PC
Timer1/Watchdog:	1, 12-bit, time bases µs, ms, s
Timer2:	1, 12-bit, time bases µs, ms, s
Counter:	1, 16-bit, signal channel 0, Limit frequency 100 kHz


EMC – Electromagnetic compatibility

The product complies with the European EMC directive. The tests were carried out by a certified EMC laboratory in accordance with the norm from the EN 61326 series (IEC 61326). The limit values as set out by the European EMC directive for an industrial environment are complied with. The respective EMC test report is available on request.


Physical and environmental conditions

Dimensions:	90 x 96 mm
System bus:	PCI 32-bit 5 V acc. to specification 2.1 (PCISIG)
Mounting in:	PC104-Plus system
Operating voltage:	+5 V or +3.3 V, ± 5 % from the PC
Current consumption:	
+ 3.3 V from PC	95 mA
+ 5 V from the PC	45 mA
I/O-connector:	40-pin male connector (2-row, 2.54 mm grid)
Temperature range:	0 to 60 °C (with forced cooling) -40 to +85 °C (with forced cooling), PC104-PLUS1500-EXT


Simplified block diagram

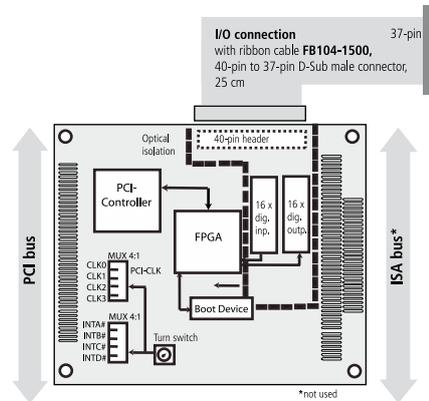

Pin assignment – 40-pin to 37-pin male connector

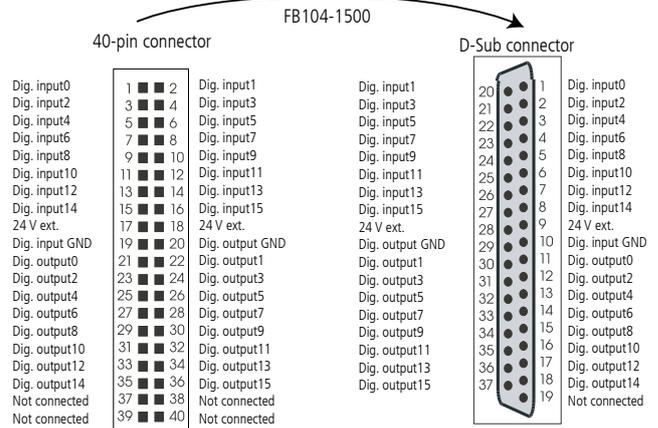

ADDI-DATA connection

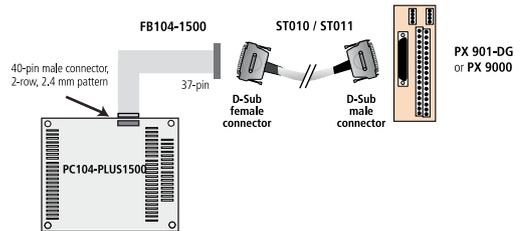

Ordering information

PC104-PLUS1500

- PC104-PLUS1500:** Digital I/O board, optically isolated, 32 digital inputs and outputs, 24 V. Incl. technical description and software drivers.
- PC104-PLUS1500-EXT:** Digital I/O board, optically isolated, 32 digital inputs and outputs, 24 V, extended temperature range. Incl. technical description and software drivers.

Accessories

- FB104-1500:** Ribbon cable, 40-pin to 37-pin D-Sub male connector, 25 cm
- PX901-D:** Screw terminal panel, LED status display
- PX901-DG:** Screw terminal panel, LED status display, for DIN rail
- PX9000:** 3-row screw terminal panel, for DIN rail, LED status display
- PX8500-G:** Relay output board for DIN rail, cascadable

- ST010:** Standard round cable, shielded, twisted pairs, 2 m
- ST011:** Standard round cable, shielded, twisted pairs, 5 m
- ST010-S:** Same as ST010, for high currents (24 V supply separate)
- ST021:** Round cable between FB104-1500 and PX 8500-G, shielded, twisted pairs, 2 m
- ST022:** Round cable between PX 8500-G and PX 901-DG, shielded, 2m
- ST8500:** Ribbon cable for cascading two PX 8500-G